


249.00 EUR
incl. 19% VAT, plus [shipping](#)

- J1900 ! JIMB-1900-6C !
- 6x USB !
- Power Onbaord !
- Thin miniITX !

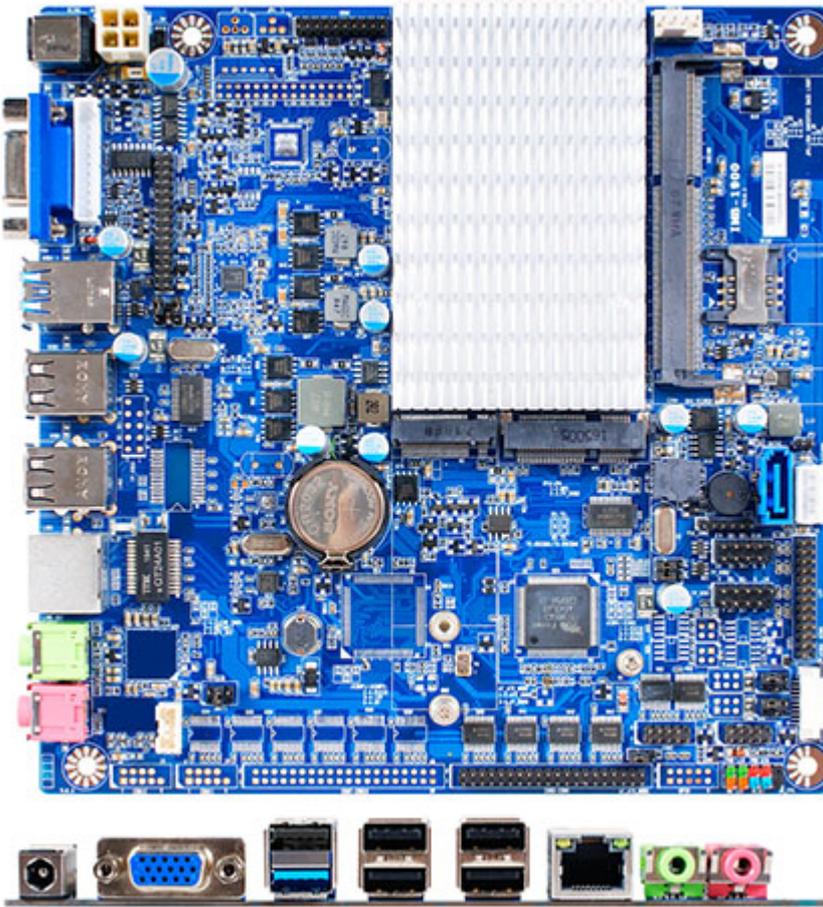

Support: [Datasheet](#)

- Intel® Quad Core J1900 processor
- ONE 204-pin SO-DIMM up to 8GB DDR3L 1333 MHz SDRAM
- Support 1* VGA, 1* HDMI
- Support 1* Mini PCIe
- 1* USB3.0, 9* USB2.0, 6* COM
- Thin Mini ITX Form Factor

| | |
|------------------------|---|
| Chipset | – INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor – 2 Phase CPU Power Support |
| I.O Chipset | – FINTEK F81866AD-I |
| Memory | – 1*SO-DIMM slot – Support DDR3L 1333 – Max. capacity of system memory up to 8GB |
| Expansion Slots | – 1* Mini PCI-E connector |
| Storage | – 1* Serial ATA2 3Gb/s connector – 1* M.2 Connector(2242/2260) |
| Ethernet LAN | – REALTEK® RTL8111G Chip – 1* PCI Express Gigabit LAN |
| EDP | – 1*EDP |
| USB | – 1* USB3.0 Port – 9* USB 2.0(5 distribute in back panel, 4 distribute in mid-board) |

| | |
|--------------------------------|---|
| <p>Special Features</p> | <ul style="list-style-type: none"> - Support CPU Smart Fan - Support Watch dog Technology - Support VGA header - Support HDMI header - Support Power On board - Support 2* RS422/RS485/RS232 COM ports - COM1/COM2 Support TTL - Thunder Protection Function - All Solid Capacitor design - All Power Pack MOSFET design |
| <p>Back Panel I/O</p> | <ul style="list-style-type: none"> - 1* USB3.0 port - 5* USB 2.0 ports - 1* RJ-45 ports - 1* Line-out connector & 1* MIC (No function) - 1* VGA port (Max. Resolution: 1920*1200@60Hz) - 1* 12V DC in |
| <p>Internal I/O</p> | <ul style="list-style-type: none"> - 2* USB 2.0 headers for 4 USB 2.0 ports - 1* CPU / Chassis Fan connectors - 6* COM headers - 1* Parallel header - 1* PS2/KB header - 1* 4-pin ATX 12V Power connector - 1* 4-pin SATA Power connector - 1* 15-pin VGA header (Max. Resolution: 1920*1200@60Hz) - 1* 20-pin HDMI header (Max. Resolution: 1920*1200@60Hz) - 1* eDP header (Max. Resolution: 2560*1600@60Hz) - 1* Mini PCI-e connector - 1* M.2 Connector(2242/2260) - 1* SATA Connector - 1* Speaker header (No function) - 1* Front panel header - 1* SIM Card socket |
| <p>BIOS</p> | <ul style="list-style-type: none"> - AMI 64MB SPI ROM |
| <p>Temperature</p> | <ul style="list-style-type: none"> - Operating: 0°C ~ 60°C - Storage: -20°C ~ 85°C |
| <p>Form Factor</p> | <ul style="list-style-type: none"> - Thin mini ITX Form Factor (170mm X 170mm) |